





PCLPRD

Radiation Damper for Premium CHOICE Low Profile Series

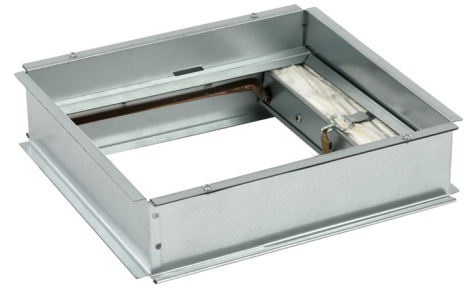

DIMENSIONS

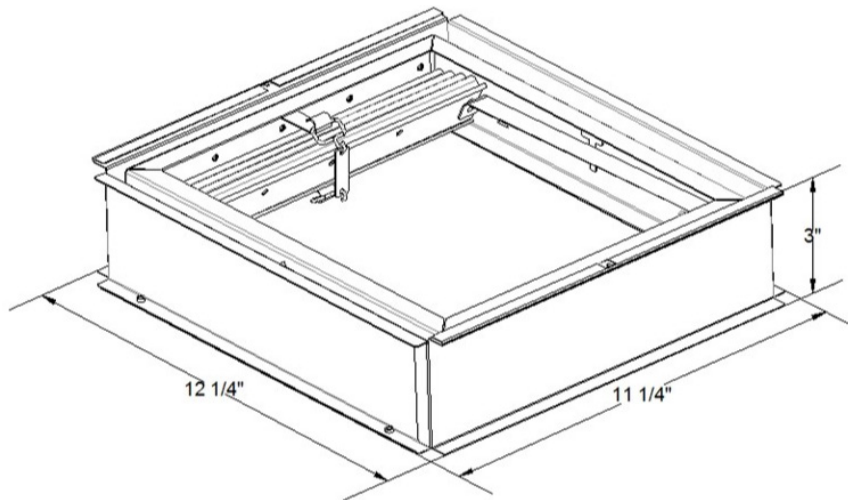

SPECIFICATIONS

- For use in 1, 2 and 3-hour rated floor-ceiling and roof-ceiling constructions
- ETL Listed (UL555C standard)
- Ceramic fiber with fiberglass cover
- Roll-formed frame 22 ga. galvanized steel

The chart below indicates which plug-&-play or other PCLP accessories can be used with the PCLPRD:

	Standard Grille	PCLPLEDK	PCLPHS	PCLPSC
PCLPRD	✓	✓	✓	✓