



# PCRL80 & PCRL80F Premium Choice Recessed Vent Light

## Specifications

- HVI certified performance, 80 CFM @ .1" SP
- Very quiet, rated at 1.2 sones
- 120V/60HZ
- Galvanized housing with black polyester powder coat finish
- Universal 4" or 6" metal duct adaptor
- 14-24" adjustable hanging bars
- Fits 2x8 construction
- PCRL80 has a E26 bulb base (bulb sold separately)
- PCRL80F has a GU24 bulb base (CFL Spiral bulb included)
- Plug-&-Play compatible with PCSC (Speed Control) and PCHS (Humidity Sensor)
- 5-year warranty




*CAL*Green



## Performance

CFM @ .1" SP	CFM @ .25" SP	Watts	Duct Dia	Sones @ .1" SP	Amps
80	50	19.7	4 & 6"	1.2	.27

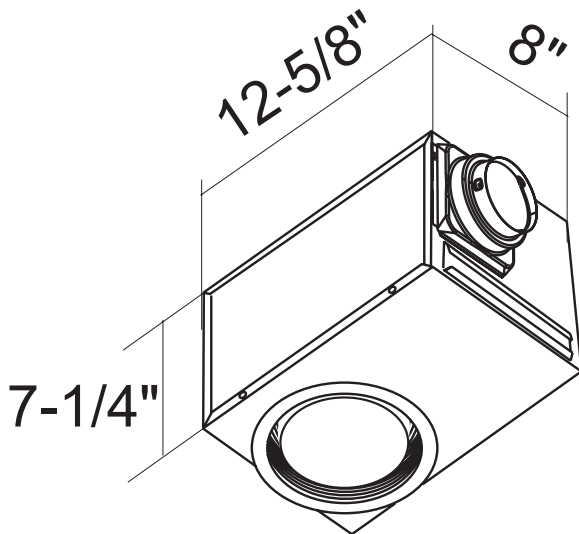

PCRL80LC Light Cover comes standard with PCRL80F and is optional with PCRL80

## Typical Specifications:

Ventilating fan shall be S&P PCRL80 or PCRL80F mounted in the ceiling. The fan shall have a 5-year limited warranty. The fan shall be HVI Certified at 0.1 inch water gauge for CFM performance above. The motor shall be ETL and cETL Listed with impedance protection plus additional thermal protection. The fan shall be ENERGY STAR® Qualified.