

P: 800.961.7370  
www.solerpalau-usa.com

# SRT-30 Rotary Spring Wound Timer

### Ratings

Resistive: 20 Amp, 125 VAC, 50/60 Hz  
10 Amp, 250 VAC, 50/60 Hz  
10 Amp, 277 VAC, 50/60 Hz

Tungsten: 7 Amp, 125 VAC

Motor: 1 HP, 120 VAC, 50/60 Hz  
2 HP, 240 VAC, 50/60 Hz


Operating Temp: -40°F to 104°F

Style: Can be used with decorator & toggle type switch plates

Dimensions: 2.79" H x 1.6" W x 1.19" D

Time Cycle: 30 Minutes

Color: White

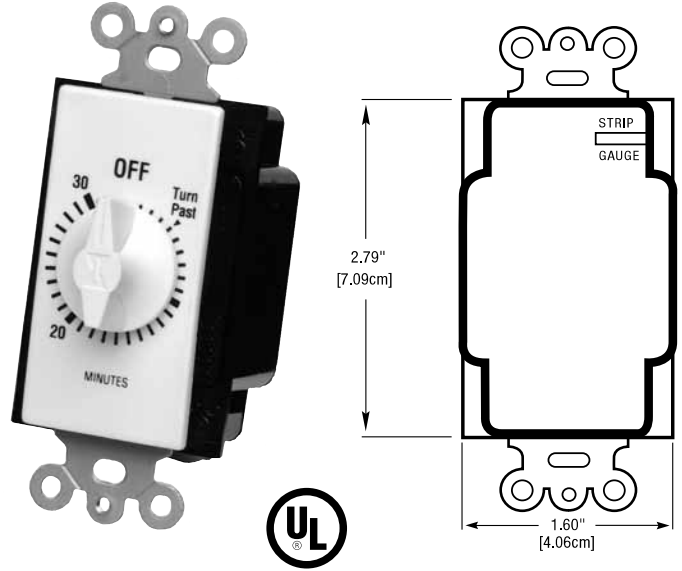

Auto-Off Timers are designed to replace any standard wall switch - single or multi-gang. This series of energy-efficient mechanical timers do not require electricity to operate. In addition, they automatically limit the ON times for fans.

### Features

- Hold feature enables user to override the automatic shut-off function
  - Single or multi-gang with no field modification required
  - Time saving up front terminal connection with teeter-type terminals
  - Press-on knob design ensures quick and easy installation
  - CFL Compatible
- Not for use with sunlamps, saunas, or loads that could cause personal injury if timed incorrectly.*

| ACCESSORY MODEL | 1 | 2 | 3 | 4 | 5 | REMARKS |
|-----------------|---|---|---|---|---|---------|
|                 |   |   |   |   |   |         |
|                 |   |   |   |   |   |         |
|                 |   |   |   |   |   |         |
|                 |   |   |   |   |   |         |

|                 |                  |
|-----------------|------------------|
| Project: _____  | Submitted: _____ |
| Customer: _____ | Approved: _____  |
| Location: _____ |                  |

For more information contact us at [www.solerpalau-usa.com](http://www.solerpalau-usa.com) or 1.800.961.7370 for additional submittal drawings.

S&P will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.

